

**Product name:** Antivibration pad with aluminium rail 500 mm  
**Product code:** CZACB2-600-0300-00 (set of 2 pcs)

**PRODUCT MAIN DIMENSIONS**

Length and width: 600 × 120 mm  
 Thickness (height): 90 mm



*This image may slightly differ from the real product*

| Basic characteristics   |   |
|---|---|
| <b>Product description</b>  | rubber product moulded with metal rail M10 for unit anchoring                                     |
| <b>Material composition</b>   | recycled black SBR granulate 1,0 -3,0 mm<br>PU binder   |
| <b>Colour</b>   | black   |
| <b>Colour stability</b>   | the colour may change when exposed to UV rays   |
| <b>Chemical resistance</b>  | do not use in the presence of oils, petroleum and its derivatives, strong acids and strong alkali |
| <b>REACH regulation (EC) 1907/2006 Substances of Very High Concern (SVHC)</b> | PASS (SVHC ≤ 0,1 % (w/w))   |
| <b>Reaction to fire class</b>   | Efl (according to EN 13501-1)   |
| <b>Connection type</b>  | stand-alone base  |
| <b>Recommended underlay</b>   | solid underlay  |
| <b>Dimensional tolerance*</b>   | according to drawing  |
| <b>Product weight (1pc)</b>   | 4,0 kg ± 0,2 kg   |
| <b>Recycled content</b>   | >90%  |


| Shipping and storage details                         |         |                           |
|--|---------|---------------------------|
| <b>TWO PIECES OF PRODUCT TIED WITH PLASTIC STRAP</b> |         |                           |
| Product code for set of 2 pcs                        |         | <b>CZACB2-600-0300-00</b> |
| Length and width*                                    | mm      | 600 × 120                 |
| Thickness (height)*                                  | mm      | 180                       |
| Weight   | 2 pc/kg | 8,0                       |
| Pieces per pallet                                    | set/pal | 100                       |
| Pallet dimensions                                    | mm      | 1200×1200                 |

| Revision |           |  |
|----------|-----------|--|
| Rev. No. | Date      | Description  |
| 1        | 1.11.2022 | <i>Drawing part updated</i>  |
| 2        | 14.9.2023 | <i>Reaction to fire class and REACH classification added, drawing part updated</i> |

*\*) The specified limit values are guaranteed only for the temperature range +23.0 +/- 5 °C, relative humidity 50.0 +/- 5 % according to EN 822, EN 823 and only if they are measured 24 hours after unpacking and relaxing of the products.*

**Use**  
 Pad under HVAC unit

Drawing part

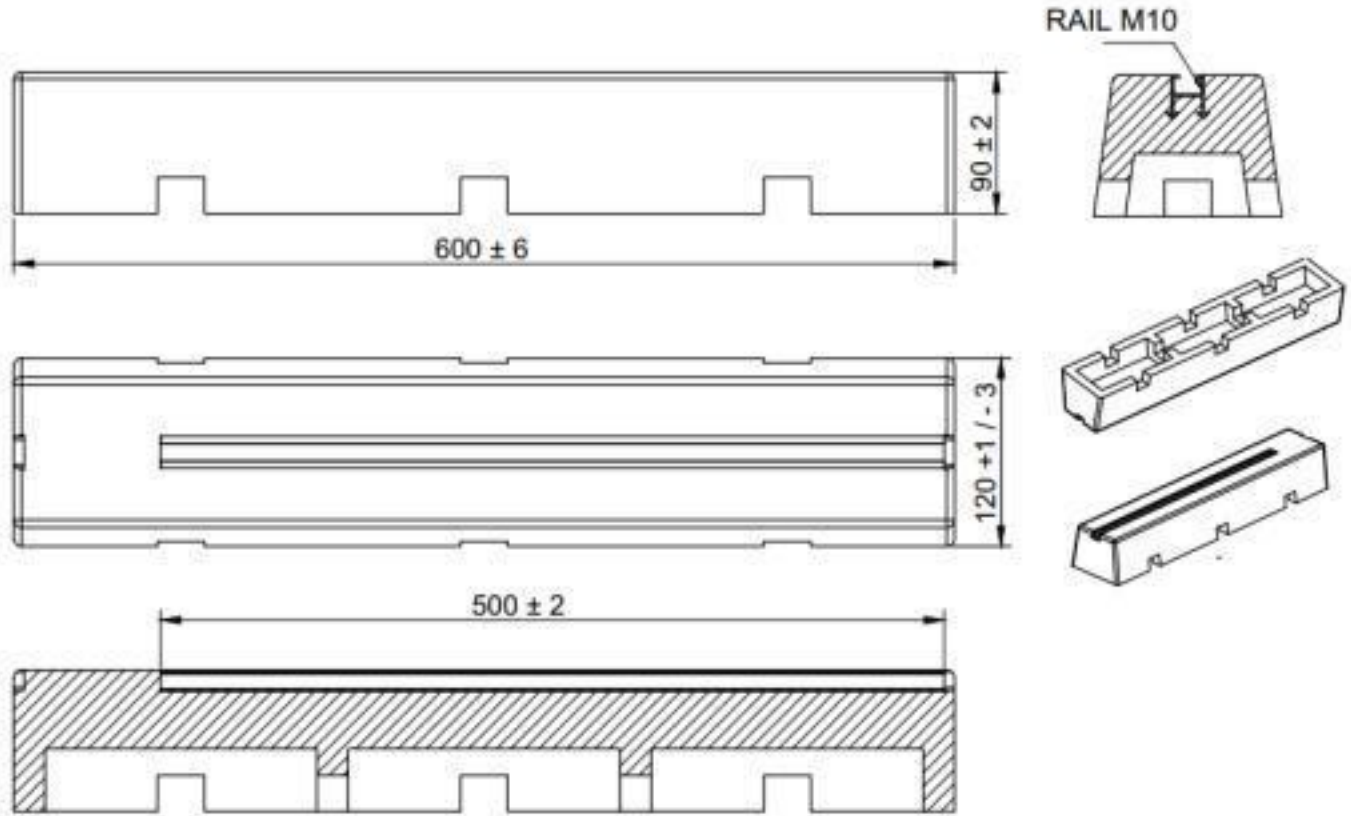

This technical specification is issued in accordance with current knowledge and experiences of the manufacturer as well as external and internal testing. The manufacturer reserves the right to change these data. The products may only be used for the purpose for which they were manufactured and tested. Otherwise, the manufacturer does not guarantee the lifetime or properties of the products or any damage that may occur. Products must not be exposed to strong acids, bases, oxidizing agents or oils. For cleaning, water or a mild detergent solution can be used without use of abrasive agents or tools. At the end of their product life, they can be 100 % recycled or landfilled under No. 191 204 Plastics and Rubber according to the Waste Catalogue with accordance to applicable local and national regulations.